


SeaRox® MA 740 ALU

SeaRox MA 740 ALU is a soft, resilient roll made of stone wool. SeaRox MA 740 ALU is supplied as a highly compressed roll. The product is as standard supplied with reinforced alu foil. Glass cloth (GW-A and ALU-G) facings are available on request.

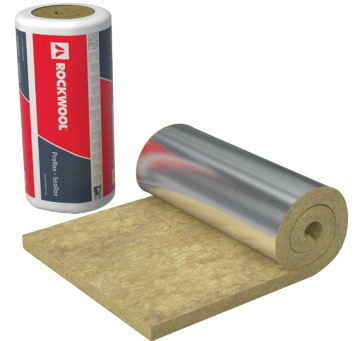

Application

SeaRox MA 740 ALU is primarily used for comfort insulation. The high compression reduces the transport cost significantly.

Product properties

Properties	Performance	Norm
Thermal conductivity	T (°C) λ (W/mK)	10 0,035
Nominal density	45 kg/m ³ GW-A and ALU-G facings, 30mm: approx. 50 kg/m ³	EN 12667
Compressive strength	-	EN 1602 / IMO
Fire classification	Non-combustible Low Flame-Spread Properties	EN 826
Water absorption (short term)	< 1 kg/m ²	Acc. IMO FTP code
Max. Application Temperature	Wool: 250°C Facing: 80°C	EN 1609 AC
Sound absorption directly mounted (unfaced)	α _w = 0,6 Thickness: 50 mm	-
		ISO 354 (approximated) Evaluated after ISO 11 654

Compliance

- SeaRox MA 740 ALU complies with directive 2014/90/EU of 23 July on marine equipment (MED) and IMO 2010 FTP Code.
- Above product declarations are also applicable for product with optional facing.
- ROCKWOOL stone wool insulation is made from volcanic rock and complies with Note Q, regulation (EC) No. 1272/2008.

As ROCKWOOL has no control over insulation design and workmanship, accessory materials or applications conditions, ROCKWOOL does not warranty the performance or result of any installation containing ROCKWOOL products. ROCKWOOL's overall liability and the remedies available are limited by the general terms and conditions of sale. This warranty in lieu of all other warranties and conditions expressed or implied, including the warranties of merchantability and fitness for a particular purpose. ROCKWOOL Technical Insulation reserves the right to make necessary product changes at any time. Technical specifications are thus stated subject to change.

ROCKWOOL® Technical Insulation, ROCKWOOL®, SeaRox® and ProRox® are registered trademarks of ROCKWOOL A/S and cannot be used without a prior written consent.



0575



0097